

Daily Switch-On



“Before switching on the machine, ensure the following:

The mains switch is on.
The water mains tap is open”.


Turn the master switch (1) to position 1. The indicator light “machine on” (5) switches on.

If the water level in the boiler is less than the minimum required, the boiler is filled up to the correct level.

Turn the master switch (1) to position 2.

“Heating” now begins.

At the end of the day, turn the machine OFF by turning the main ON/OFF switch (1) to position 0.

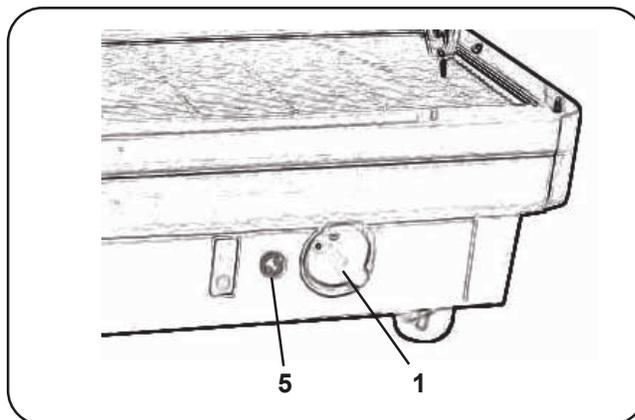


Cup-Warmer (when provided)

Place only coffee cups, cups and glasses to be used in conjunction with the coffee machine on the cup-warming plate.

Ensure that the coffee cups are completely drained before placing them on the cup-warming plate.

No other objects shall be placed on the cup-warming plate (11).

Press the button (12) and check to see that the light turns on.

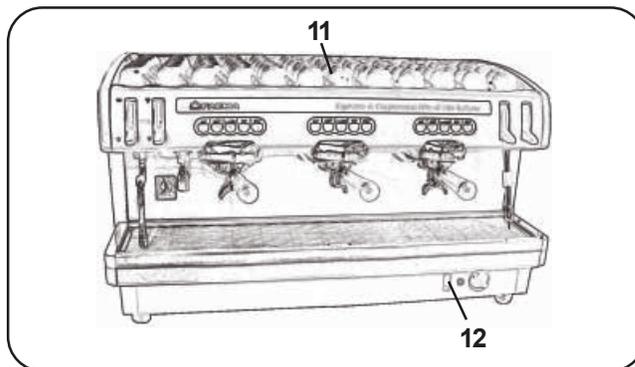


Heating phase

During heating, if one of the coffee dispensing push buttons is pressed, the machine dispenses a coffee at the temperature reached at the time.

Heating is completed when the boiler gauge indicator (14) remains stable in the green area.

The machine is now ready to dispense coffee, steam and hot water.

To make sure that the dispenser unit and the filter holder (10) are at similar temperatures, press the coffee dispensing push button (18) and let the machine dispense coffee for a few seconds. Then press again the push button (18) to stop dispensing.

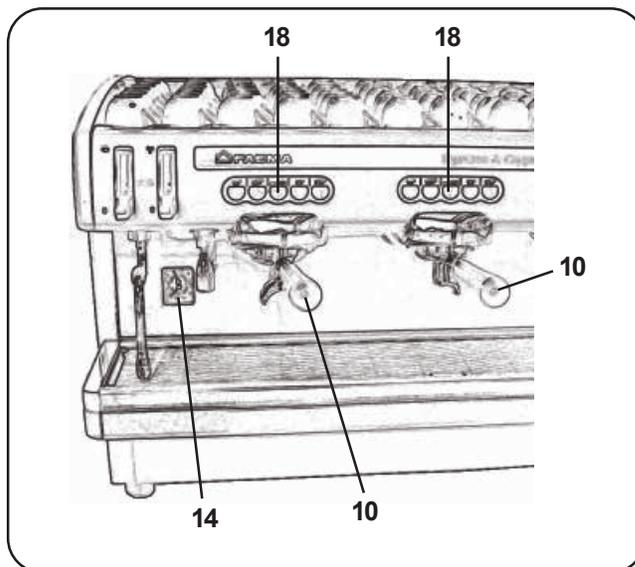

Delivery of the coffee

Remove the filter holder (10), empty out any coffee grouts and fill it up with 1 or 2 servings of ground coffee, depending on the filter holder used.

Press the ground coffee in filter down uniformly, using the grinder/doser presser.


Remove any residues of ground coffee from the filter rim.

Fit and tighten the filter holder (10) on the coffee dispenser unit, positioning the cup (or cups) under the nozzle (or nozzles) of the filter holder (10).

Press the coffee dispensing push button (16, 17, 19, 20) for the required serving; the machine will stop automatically.

Press the push button (18) for continuous dispensing.

Dispensing, whether for dosed servings or in the continuous dispensing mode, can be interrupted at any time by pressing the STOP push button (18).

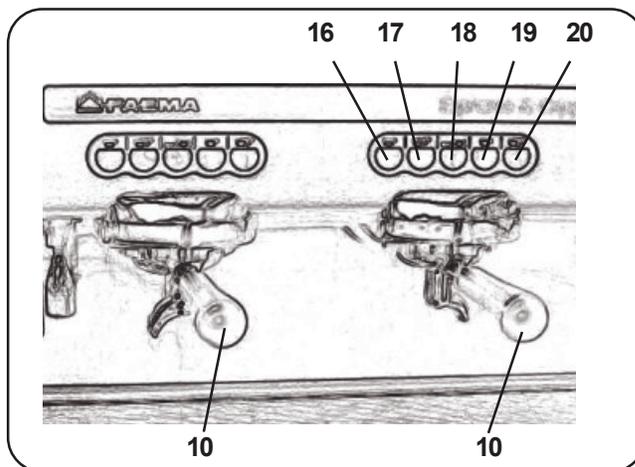


Steam dispensing

Completely immerse the right or left steam nozzle (6) into the container with the liquid to be heated and push the steam control lever (7) upwards.

Wait until the liquid has reached the desired temperature, then lower the steam command lever (7) to stop the issue of steam.

Note: At the conclusion of each steam dispensing phase, clean the inside of the steam nozzle as follows:

Turn the nozzle towards the cup tray and carefully activate steam dispensing at least once.

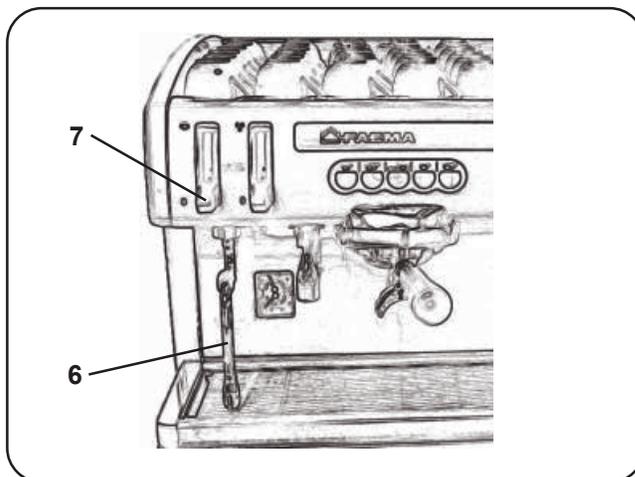

Hot water dispensing

DOSED FUNCTION

After having positioned the appropriate container under the hot water nozzle (8), raise the hot water dispensing lever (9): afterwards, the lever automatically returns to the original position. The hot water will be dispensed and will stop automatically.

The water can be interrupted at any time by raising the hot water lever again (9).

